



### **SURFACE MOUNT SCHOTTKY BARRIER**


VOLTAGE CURRENT 0.8 Ampere 40 Volt


#### **FEATURES**


- · Low turn-on voltage
- · Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.
- · Lead free in compliance with EU RoHS 2.0
- · Green molding compound as per IEC 61249 standard

### **MECHANICAL DATA**

- · Case: SOD-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- · Polarity: Color band denotes cathode end
- · Approx. Weight: 0.00014 ounces, 0.004 grams
- · Marking : GW





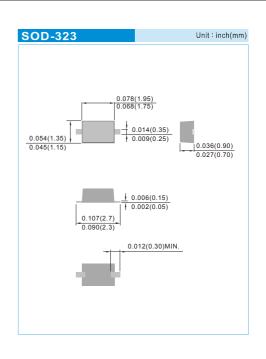

### MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	40	V
Maximum RMS Voltage	num RMS Voltage V <sub>RMS</sub> 28		V
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	V
Maximum Average Forward Current	I <sub>F(AV)</sub>	0.8	А
Peak forward surge current: 8.3ms single half sine-wave superimposed on rated load	I FSM	8	Α
Typical Thermal Resistance (Note 1)	R <sub>eJA</sub>	650	°C / W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	°C

#### NOTE:

1. Mounted on a FR4 PCB, single-sided copper, mini pad.


### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER		VALUE	UNITS
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	0.56@ 0.8A	V
Maximum Reverse Current	I <sub>R</sub>	100@VR=40V	uA

PAGE . 1 September 23,2019-REV.03





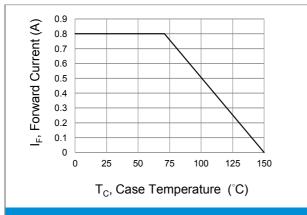

**Fig.1 Forward Current Derating Curve** 

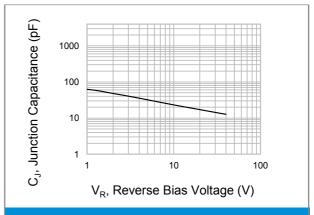


Fig.2 Typical Junction Capacitance

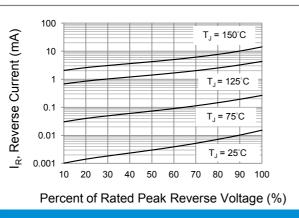


Fig.3 Typical Reverse Characteristics


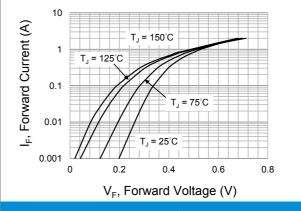


Fig.4 Typical Forward Characteristics




**Fig.5 Operating Temperature Derating Curve** 

September 23,2019-REV.03 PAGE . 2

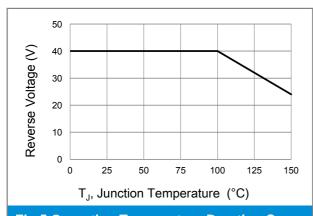



### **MOUNTING PAD LAYOUT**

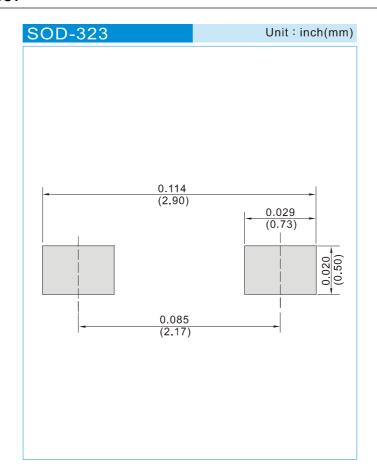

### **ORDER INFORMATION**

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 5K per 7" plastic Reel






## Part No\_packing code\_Version

SS0840WS\_R1\_00001 SS0840WS\_R2\_00001

## For example:

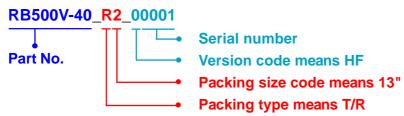

Packing Code XX			Version Code XXXXX			
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	s	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

September 23,2019-REV.03 PAGE . 4





## **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

September 23,2019-REV.03 PAGE . 5