

MMBT2907A

PNP GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE 60 Volt **POWER** 225 mWatt



FEATURES

- PNP epitaxial silicon, planar design
- Collector-emitter voltage $V_{CE} = -60V$
- Collector current $I_C = -600mA$
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

Case : SOT-23
Terminals : Solderable per MIL-STD-750, Method 2026
Approx Weight : 0.0084 grams

SOT-23 Unit : inch(mm)

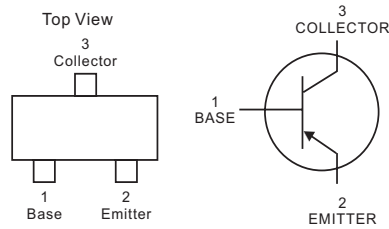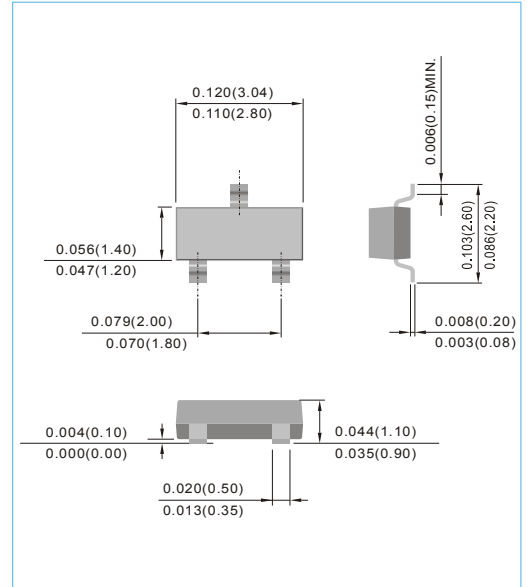

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	-60	V
Collector-Base Voltage	V_{CBO}	-60	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-600	mA

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Max Power Dissipation (Note 1)	P_{TOT}	225	mW
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$
Junction Temperature	T_J	-55 to 150	$^{\circ}C$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^{\circ}C / W$

Note 1 : Transistor mounted on FR-4 board 70 x 60 x 1mm.

MMBT2907A

ELECTRICAL CHARACTERISTICS (T_J=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Emitter Breakdown Voltage	V _(BR) CEO	I _C = -10mA, I _B = 0	-60	-	-	V
Collector-Base Breakdown Voltage	V _(BR) CBO	I _C = -10μA, I _E = 0	-60	-	-	V
Emitter-Base Breakdown Voltage	V _(BR) EBO	I _E = -10μA, I _C = 0	-5.0	-	-	V
Base Cutoff Current	I _{BL}	V _{CE} = -30V, V _{EB} = -0.5V	-	-	-50	nA
Collector Cutoff Current	I _{CEX}	V _{CE} = -30V, V _{EB} = -0.5V	-	-	-50	nA
	I _{CBO}	V _{CE} = -50V, I _E = 0	-	-	-10	nA
		V _{CE} = -50V, I _E = 0 T _J = 125°C	-	-	-10	μA
DC Current Gain	h _{FE}	I _C = -0.1mA, V _{CE} = -10V I _C = -1.0mA, V _{CE} = -10V I _C = -10mA, V _{CE} = -10V I _C = -150mA, V _{CE} = -10V I _C = -500mA, V _{CE} = -10V	75 100 100 100 50	- - - - -	- - - 300 -	-
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _C = -150mA, I _B = -15mA I _C = -500mA, I _B = -50mA	- -	- -	-0.4 -1.6	V
Base-Emitter Saturation Voltage	V _{BE(SAT)}	I _C = -150mA, I _B = -15mA I _C = -500mA, I _B = -50mA	- -	- -	-1.3 -2.6	V
Collector-Base Capacitance	C _{CB0}	V _{CB} = -10V, I _E = 0, f = 1MHz	-	-	8.0	pF
Emitter-Base Capacitance	C _{EBO}	V _{CB} = -2V, I _C = 0, f = 1MHz	-	-	30	pF
Current Gain-Bandwidth Product	F _T	I _C = -50mA, V _{CE} = -20V, f = 100MHz	200	-	-	MHz
Turn-On Time	t _{on}	V _{CC} = -30V, V _{BE} = -0.5V, I _C = -150mA, I _B = -15mA	-	-	45	ns
Delay Time	t _d	V _{CC} = -30V, V _{BE} = -0.5V, I _C = -150mA, I _B = -15mA	-	-	10	ns
Rise Time	t _r	V _{CC} = -30V, V _{BE} = -0.5V, I _C = -150mA, I _{B1} = -15mA	-	-	40	ns
Turn-Off Time	t _{off}	V _{CC} = -6V, I _C = -150mA, I _{B1} = I _{B2} = -15mA	-	-	100	ns
Storage Time	t _s	V _{CC} = -6V, I _C = -150mA, I _{B1} = I _{B2} = -15mA	-	-	80	ns
Fall Time	t _f	V _{CC} = -6V, I _C = -150mA, I _{B1} = I _{B2} = -15mA	-	-	30	ns

MMBT2907A

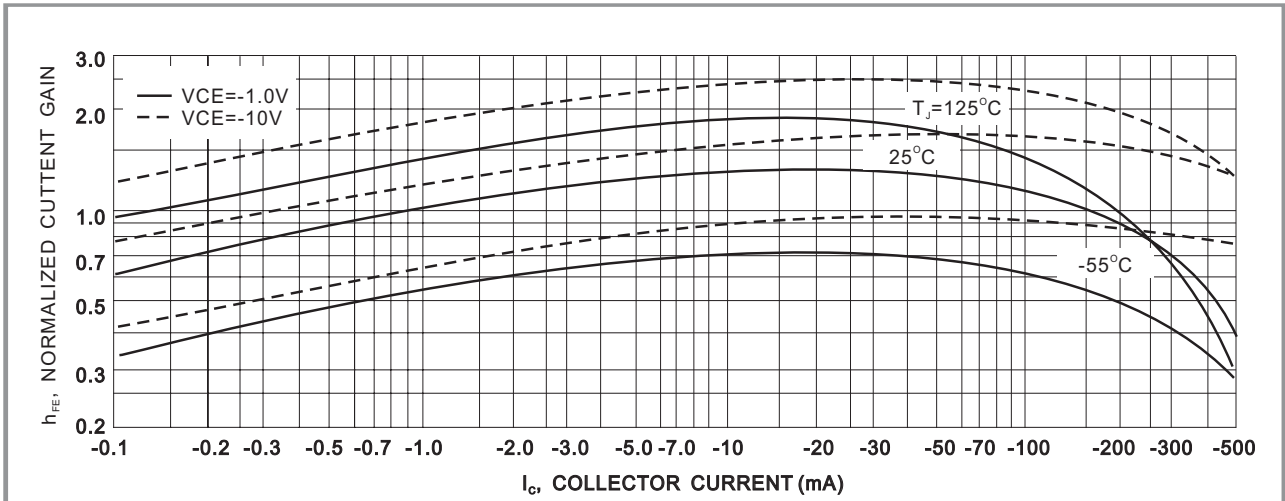


Fig.1-DC Current Gain

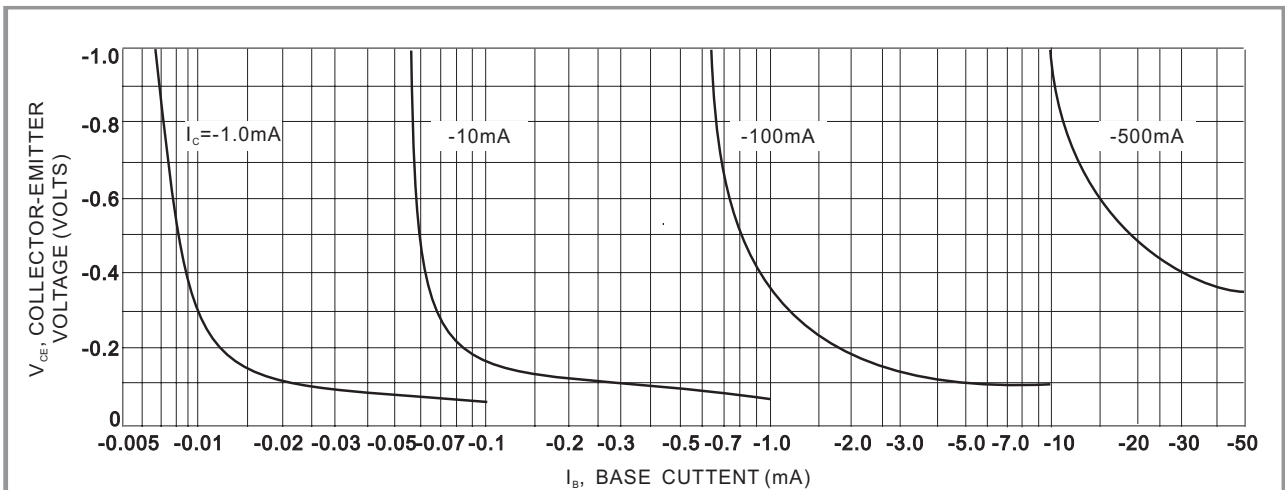


Fig.2-Collector Saturation Region

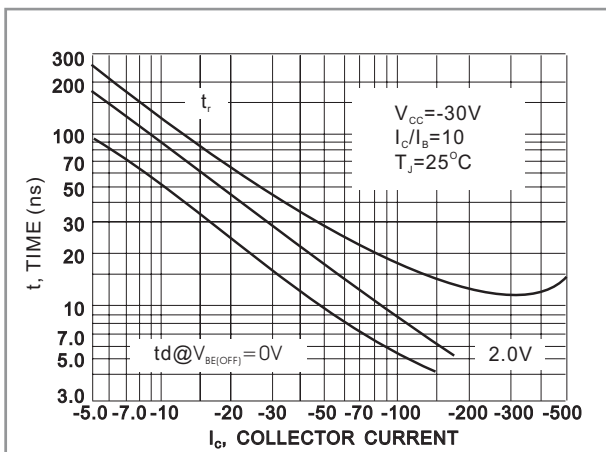


Fig.3-Turn-On Time

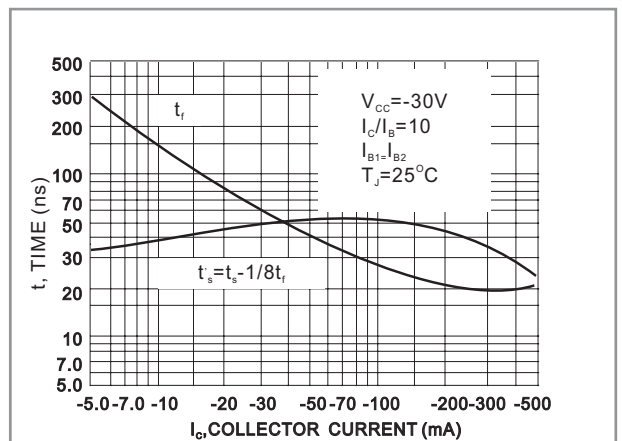


Fig.4-Turn-Off Time

MMBT2907A

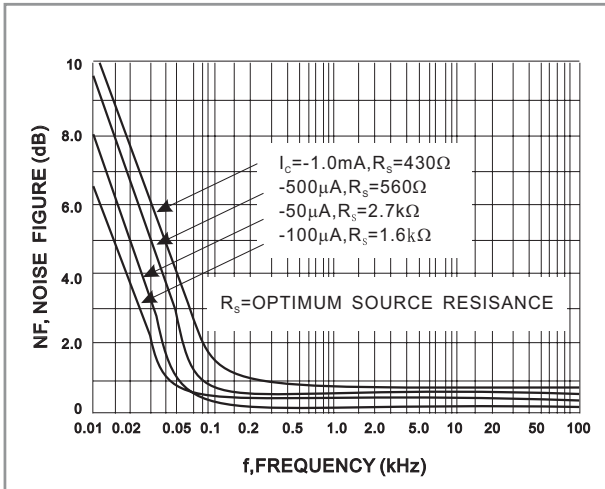


Fig.5-Frequency Effects

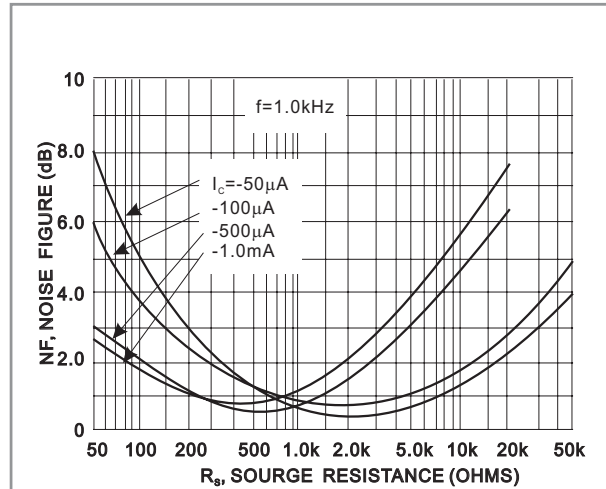


Fig.6-Source Resistance Effects

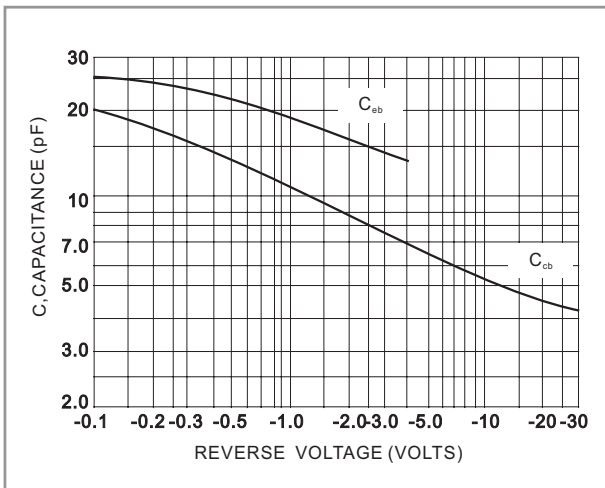


Fig.7-Capacitances

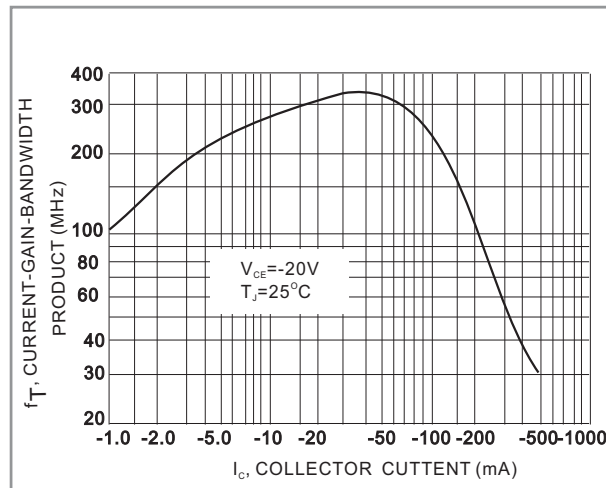


Fig.8-Current-Gain-Bandwidth Product

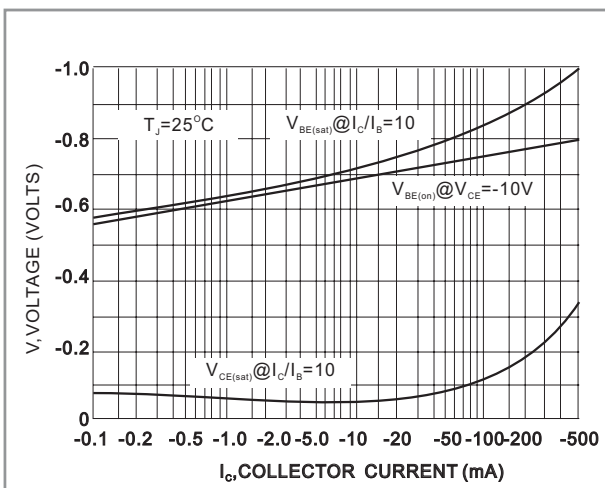


Fig.9-On Voltage

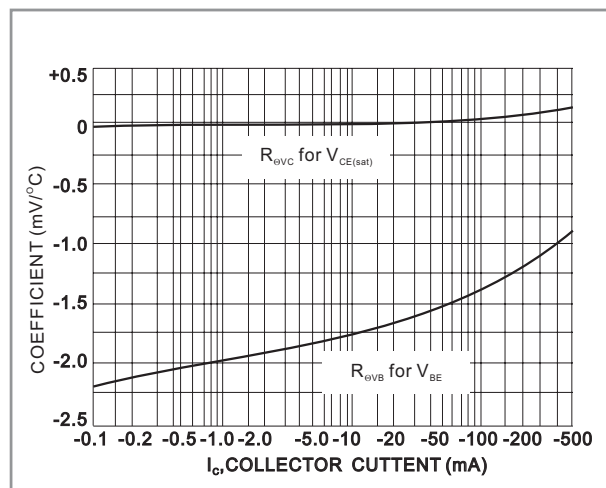



Fig.10-Temperature Coefficients

MMBT2907A

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
MMBT2907A	SOT-23	3K pcs / 7" reel	M7A

Mounting Pad Layout

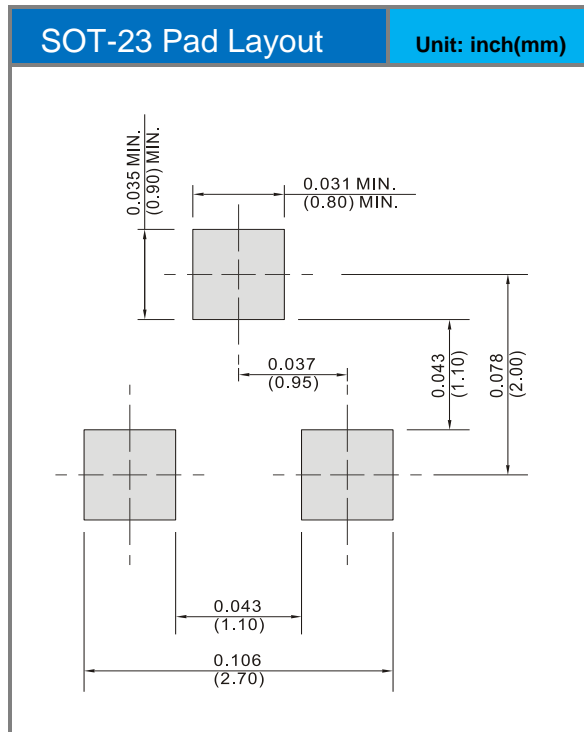

MMBT2907A

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.