

# PE4705AS ~ PE4736AS Series

## Hi-Surge ESD Protection

**Voltage**

**5 ~ 36 V**


### Features

- IEC61000-4-2(ESD) :  $\pm 15\text{kV}$  Air,  $\pm 8\text{kV}$  Contact  
Compliance with the capability up to  $\pm 30\text{kV}$
- IEC61000-4-4(EFT) : 40A(5/50ns)
- IEC61000-4-5(Lightning) : 19A ~ 100A(8/20uS)
- Low clamping voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Mechanical Data

- Case : SOD-123 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0104 grams

SOD-123



## Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V <sub>ESD</sub>	$\pm 30$	kV
ESD IEC61000-4-2(Contact)		$\pm 30$	
Typical Thermal Resistance <sup>(Note 1)</sup>	R <sub>θJA</sub>	510	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-55~150	°C
Storage Temperature Range	T <sub>STG</sub>	-55~150	°C

## PE4705AS ~ PE4736AS Series

### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

#### PE4705AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1\text{mA}$	5.5	-	9	V
Reverse Leakage Current	$I_R$	$V_R = 5\text{V}$	-	-	3	$\mu\text{A}$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	9	V
		$I_{PP} = 100\text{A}, t_P = 8/20\mu\text{s}$	-	-	14.5	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1\text{MHz}$	-	-	1300	pF

#### PE4707AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	7	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1\text{mA}$	7.7	-	9.5	V
Reverse Leakage Current	$I_R$	$V_R = 7\text{V}$	-	-	1	$\mu\text{A}$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	10.5	V
		$I_{PP} = 88\text{A}, t_P = 8/20\mu\text{s}$	-	-	16.5	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1\text{MHz}$	-	-	960	pF

#### PE4709AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	9	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1\text{mA}$	9.9	-	12	V
Reverse Leakage Current	$I_R$	$V_R = 9\text{V}$	-	-	1	$\mu\text{A}$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	13.5	V
		$I_{PP} = 73\text{A}, t_P = 8/20\mu\text{s}$	-	-	20	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1\text{MHz}$	-	-	700	pF

## PE4705AS ~ PE4736AS Series

### PE4712AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	12	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1mA$	13.2	-	15.5	V
Reverse Leakage Current	$I_R$	$V_R = 12V$	-	-	1	$\mu A$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	18	V
		$I_{PP} = 56A, t_P = 8/20\mu s$	-	-	27	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1MHz$	-	-	600	pF

### PE4715AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	15	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1mA$	16.5	-	20	V
Reverse Leakage Current	$I_R$	$V_R = 15V$	-	-	1	$\mu A$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	22.5	V
		$I_{PP} = 45A, t_P = 8/20\mu s$	-	-	32	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1MHz$	-	-	480	pF

### PE4720AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	20	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1mA$	22	-	26	V
Reverse Leakage Current	$I_R$	$V_R = 20V$	-	-	1	$\mu A$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	30	V
		$I_{PP} = 34A, t_P = 8/20\mu s$	-	-	43	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1MHz$	-	-	310	pF

## PE4705AS ~ PE4736AS Series

### PE4724AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	24	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1mA$	26.4	-	31	V
Reverse Leakage Current	$I_R$	$V_R = 24V$	-	-	1	$\mu A$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	35	V
		$I_{PP} = 32A, t_P = 8/20\mu s$	-	-	45	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1MHz$	-	-	280	pF

### PE4736AS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage <sup>(Note 1)</sup>	$V_{RWM}$	-	-	-	36	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BT} = 1mA$	39.6	-	46.5	V
Reverse Leakage Current	$I_R$	$V_R = 36V$	-	-	1	$\mu A$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	52.5	V
		$I_{PP} = 19A, t_P = 8/20\mu s$	-	-	75	V
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1MHz$	-	-	190	pF

# PE4705AS ~ PE4736AS Series

## TYPICAL CHARACTERISTIC CURVES

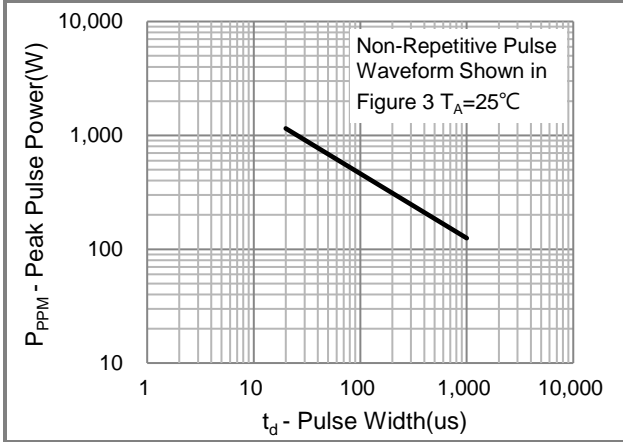


Fig.1 Peak Pulse Power Rating Curve

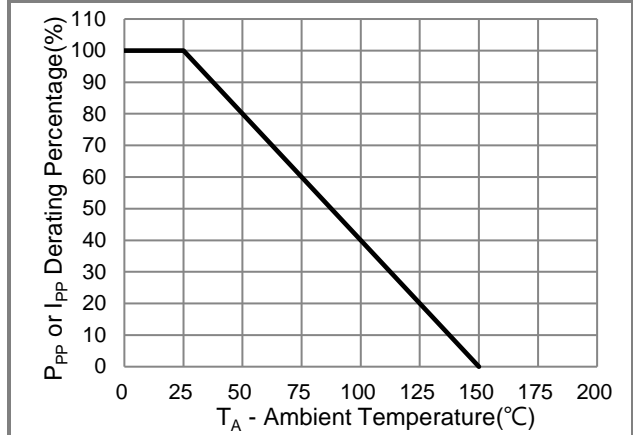


Fig.2 Derating Curve

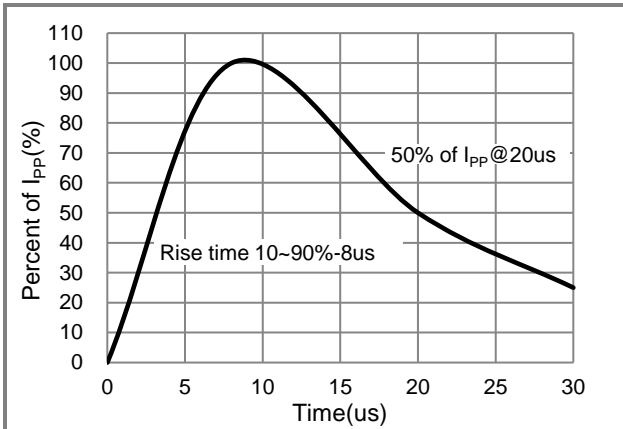


Fig.3 Pulse Waveform

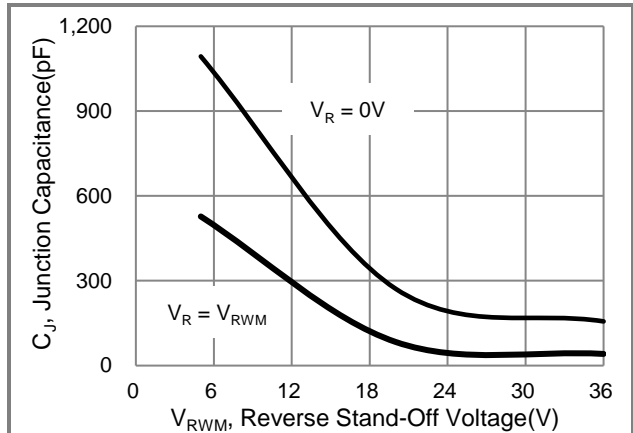




Fig.4 Typical Junction Capacitance

# PE4705AS ~ PE4736AS Series

## Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PE4705AS	SOD-123	3K pcs / 7" reel	AEK
PE4707AS	SOD-123	3K pcs / 7" reel	AEL
PE4709AS	SOD-123	3K pcs / 7" reel	AEM
PE4712AS	SOD-123	3K pcs / 7" reel	AEN
PE4715AS	SOD-123	3K pcs / 7" reel	AER
PE4720AS	SOD-123	3K pcs / 7" reel	AES
PE4724AS	SOD-123	3K pcs / 7" reel	AET
PE4736AS	SOD-123	3K pcs / 7" reel	AEU

## Packaging Information & Mounting Pad Layout

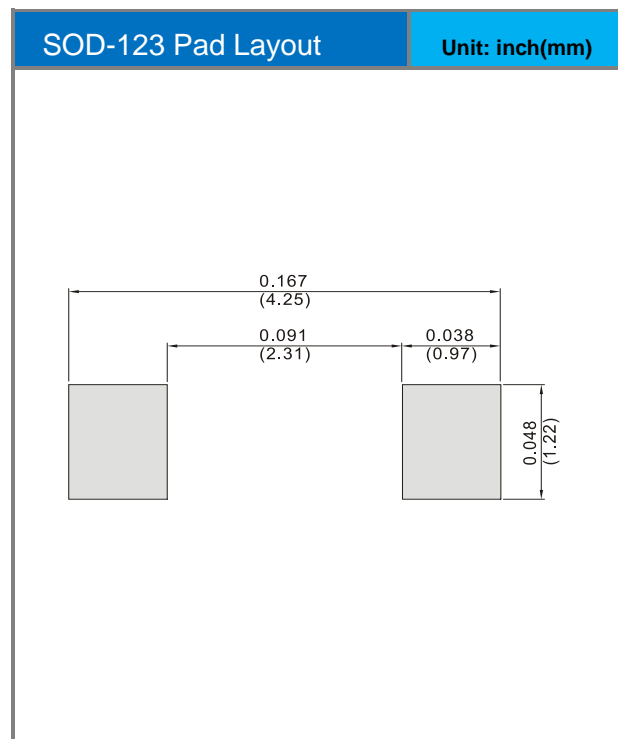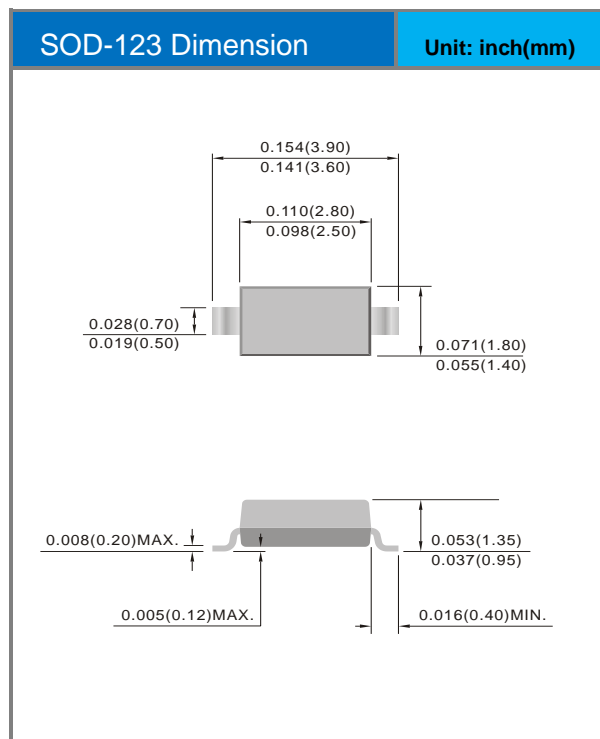

## PE4705AS ~ PE4736AS Series

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.