

-

EXTREME LOW VF SCHOTTKY RECTIFIER							
Voltage	20-40 V	Current	2 A				
Features							
 Ultra low forw Fast switchin Surface mouting Lead free in construction Green molding AEC-Q101 quick 	g speed nt package compliance with ig compound as	EU RoHS 2.0					
Application	S						
•	ectification rity protection onsumption app	lications					

Mec

- Cas
- Terr
- App

Maxim

 Mechanical Data Case: Molded plastic, SOD-123HE Terminals: Solderable per MIL-STD-750, Method 2026 Approx. Weight: 0.0006 ounces, 0.0184 grams 			Cathode Anode				
Maximum Ratings (T _A = 25 °C unless otherwise noted) PARAMETER	SYMBOL	SBA220AH-AU	SBA230AH-AU	SBA240AH-AU	UNIT		
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	V		
Maximum rms voltage	Vrms	14	21	28	V		
Maximum dc blocking voltage	VR	20	30	40	V		
Maximum average forward rectified current	I _{F(AV)}	2			А		
Peak forward surge current: 8.3ms single half sine- wave Superimposed on rated load	IFSM	30			А		
	R _{0JC} ⁽¹⁾		20				
Typical thermal resistance	R _{0JA} ⁽²⁾		185				
Operating junction temperature range	TJ	-55 to +150 °C			°C		

SOD-123HE

Electrical Characteristics

Storage temperature range

PARAMETER	SYMBOL TEST CON			SBA220AH-AU		SBA230AH-AU		SBA240AH-AU		
		NUTION	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNIT	
Forward voltage	VF	I _F = 10mA	TJ =25 °C	0.21	-	0.21	-	0.22	-	V
		I⊧ = 0.5A		0.33	-	0.34	-	0.37	-	
		IF = 2A		-	0.46	-	0.49	-	0.53	
		I⊧ = 10mA	TJ =125 °C	0.09	-	0.09	-	0.1	-	V
		I⊧ = 0.5A		0.24	-	0.26	-	0.27	-	
Reverse current		V _R = 10V	14	-	9	-	7.4	-		
	$V_{R} = 30$ $V_{R} = 40$ $V_{R} = 20$	V _R = 20V	TJ=25°C	-	100	25	-	9.6	-	μΑ
		$V_R = 30V$		-	-	-	100	16	-	
		$V_R = 40V$		-	-	-	-	-	100	
		$V_R = 20V$	T _J =125 ℃	6.1	-	3.7	-	2.3	-	mA
		$V_R = 30V$		-	-	9.6	-	3.5	-	
		$V_R = 40V$		-	-	-	-	5.6	-	

Tstg

Note : 1. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area.

2. Mounted on a FR4 PCB, single-sided copper, mini pad.


3. Short duration pulse test used to minimize self-heating effect.

٥C

-55 to +150



TYPICAL CHARACTERISTIC CURVES

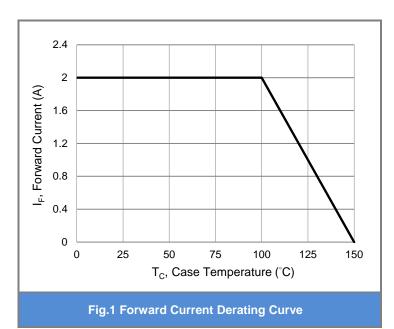

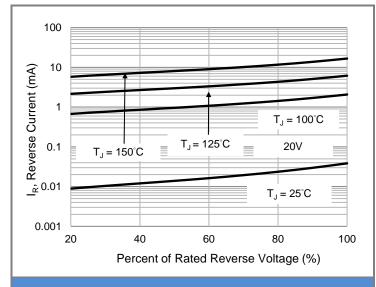
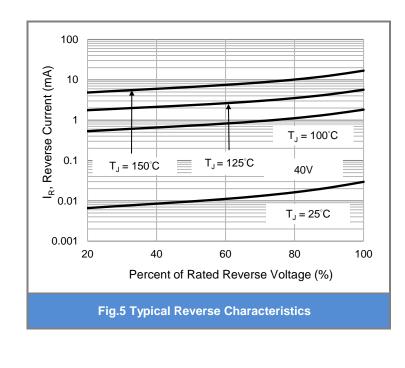
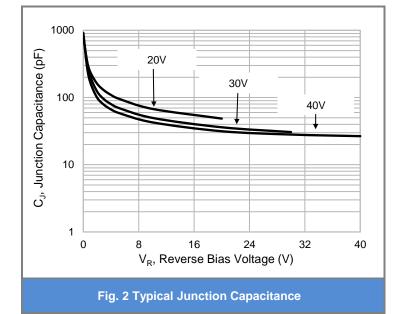


Fig.3 Typical Reverse Characteristics





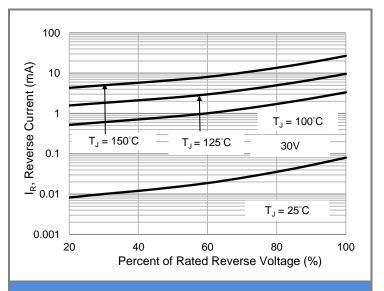
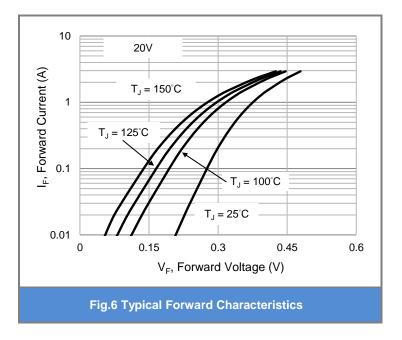


Fig.4 Typical Reverse Characteristics







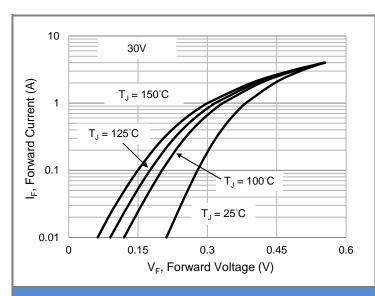


Fig.7 Typical Forward Characteristics



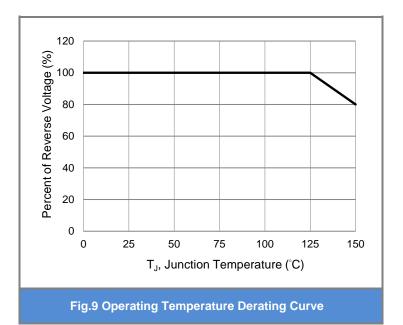


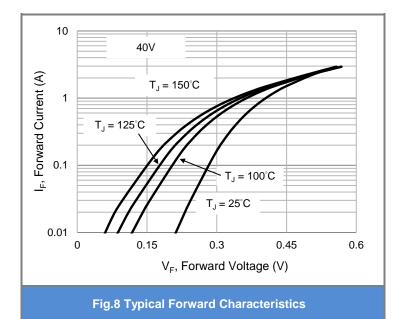

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
SBA220AH-AU	SOD-123HE	3K pcs / 7" reel	В7
SBA230AH-AU	SOD-123HE	3K pcs / 7" reel	E7
SBA240AH-AU	SOD-123HE	3K pcs / 7" reel	F7

Packaging Information & Mounting Pad Layout

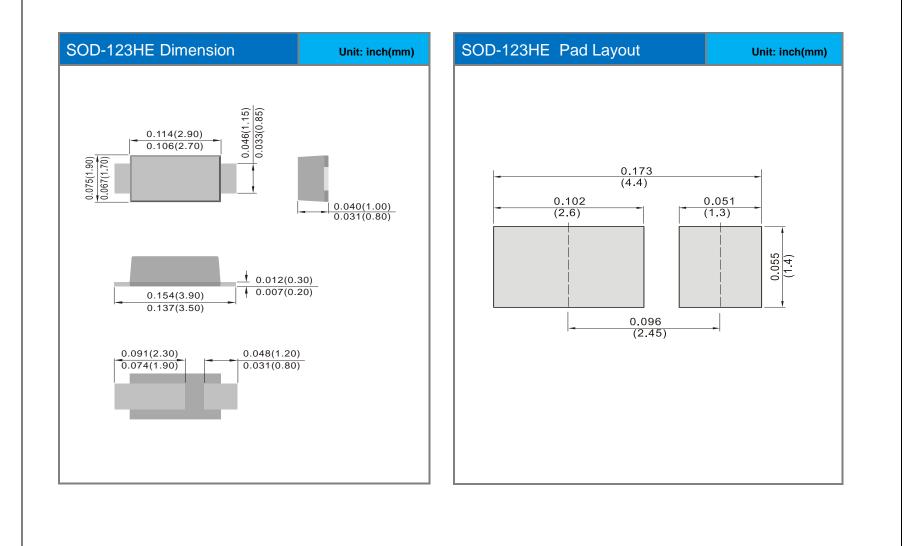



Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, noninfringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning lifesaving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.